


### Features

- 380Watts peak pulse power ( $V_P \dot{A}$ : 8/20 $\mu$ s)
- SOD-323 package
- Bidirectional configurations
- Low clamping voltage
- Low leakage current
- Medium capacitance ( $C_j=15$ pF typ.)
- Protection one data/power line to:
  - IEC 61000-4-2  $\pm 30$ kV contact  $\pm 30$ kV air  $\dot{A}$
  - IEC 61000-4-4 (EFT) 40A (5/50ns)
  - IEC 61000-4-5 (Lightning) 9A (8/20 $\mu$ s)

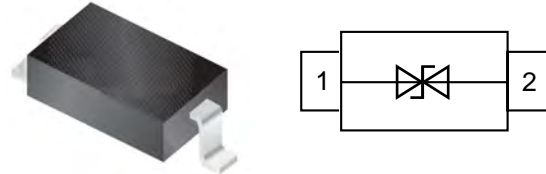

### Mechanical Data

- **Case:** SOD-323 (plastic package).  
Lead free; RoHS compliant; Halogen free
- **Molding Compound Flammability Rating:**  
UL 94 V-0
- **Terminals:** High temperature soldering guaranteed:  
260 °C/10 sec. at terminals

### Applications

- Computers and peripherals
- Communication systems
- Notebook
- Cellular handsets and accessories
- Portable electronics
- Audio and video equipment

### Absolute Maximum Ratings

Ratings at 25 °C, ambient temperature unless otherwise specified

Parameter	Symbol	Value	Unit
Peak Pulse Power ( $T_P=8/20\mu$ s)	$P_{PP}$	380	W
ESD contact/air discharge (IEC-61000-4-2)	$V_{ESD}$	30/30	kV
Peak Pulse Current ( $T_P = 8/20\mu$ s)	$I_{PP}$	9	A
Junction Temperature	$T_J$	-55 to +150	°C
Storage temperature	$T_{STG}$	-55 to +150	°C


### Electrical Characteristics

( $T_A = 25$  °C unless otherwise specified)


Parameter	Symbol	Condition	Min	Typ	Max	Unit
Reverse stand-off Voltage	$V_{RWM}$				24	V
Reverse Breakdown Voltage	$V_{BR}$	$I_T=1$ mA	26.7			V
Reverse Leakage Current	$I_R$	$V_R=24$ V			1	uA
Clamping Voltage (IEC 61000-4-5)	$V_C$	$I_{PP}=9$ A		42		V
Junction Capacitance	$C_J$	$V_R=0$ V, $f=1$ MHz		15		pF




**Typical Characteristics** ( $T_{amb} = 25\text{ }^{\circ}\text{C}$  unless otherwise specified)

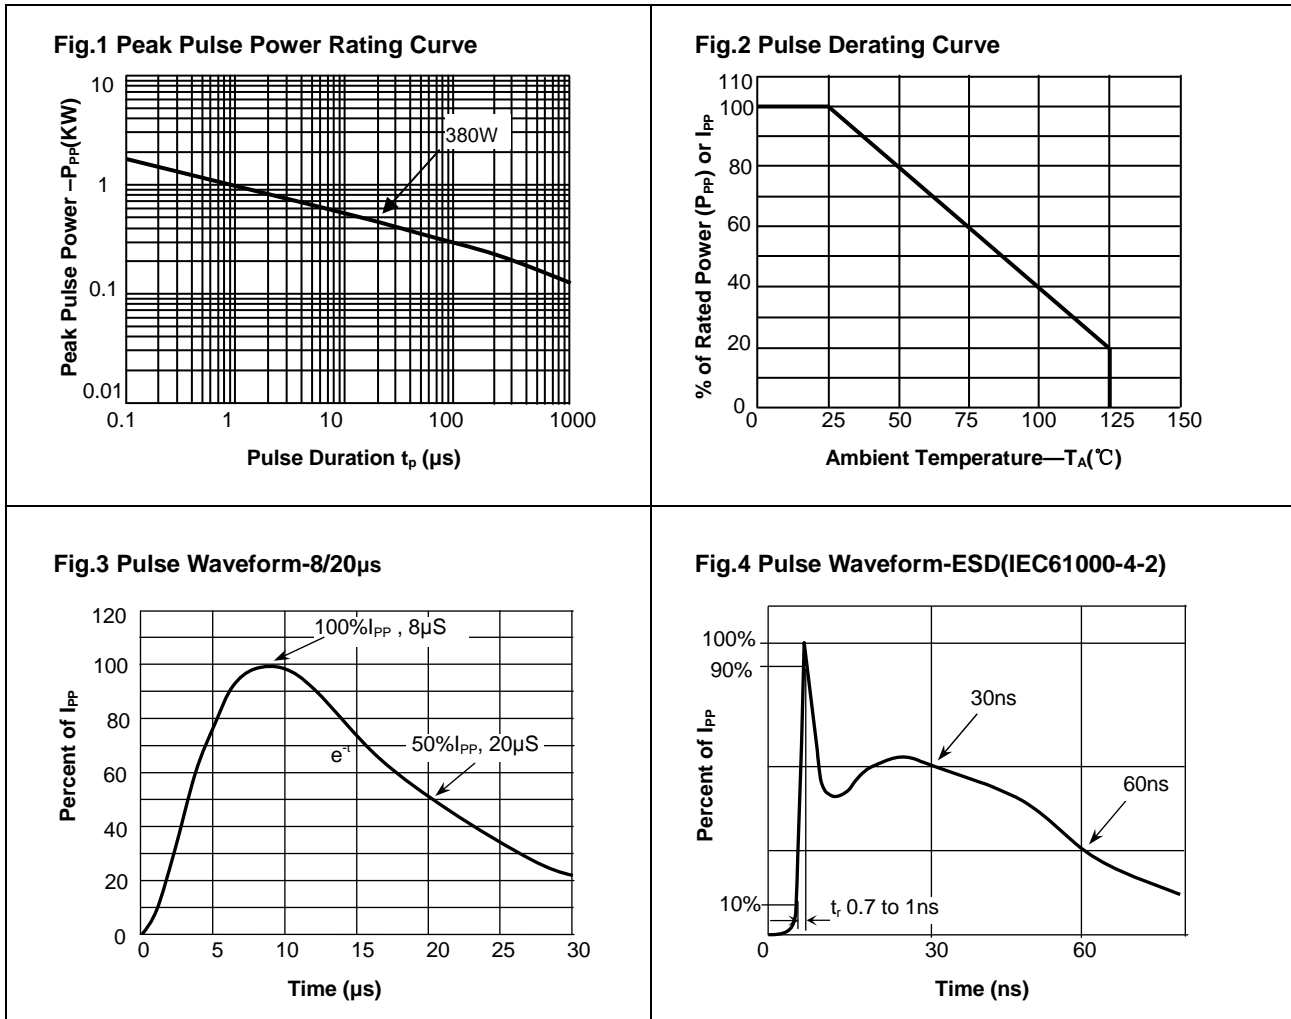


**Package Dimensions**

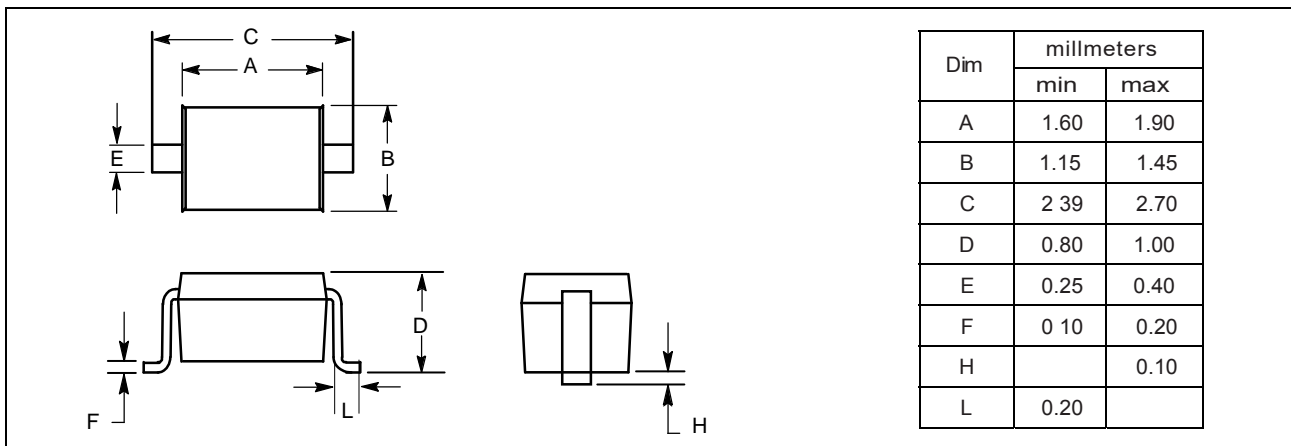

### PAD Dimension

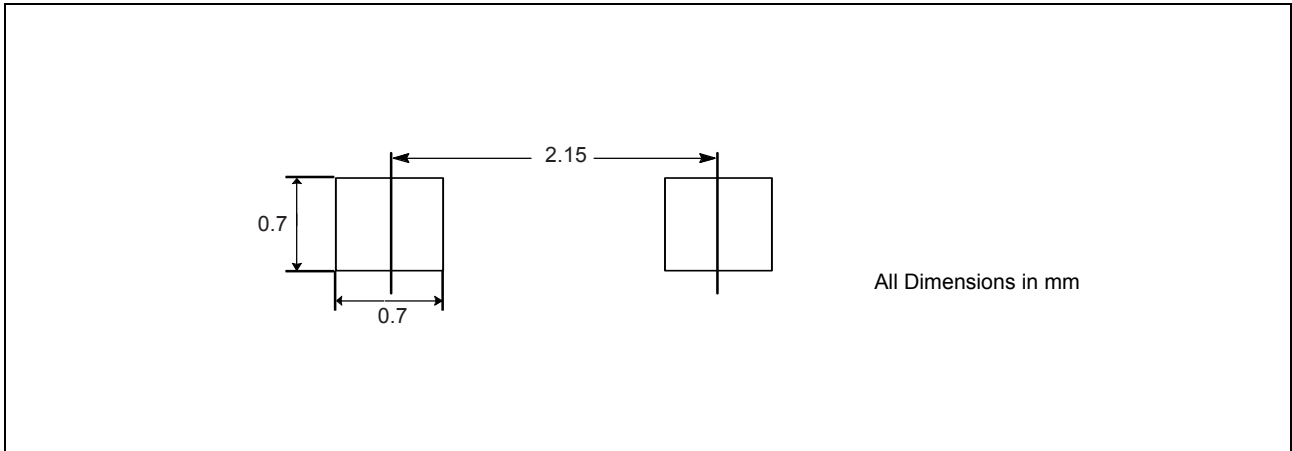

### Package Information

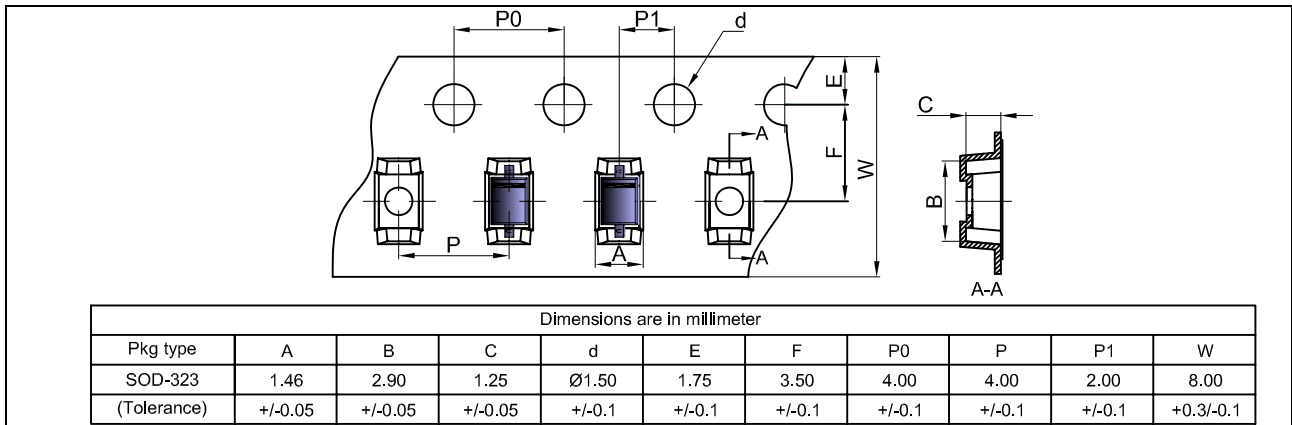

### Marking



### Ordering information

Order code	Package	Packaging option	Base quantity	Packaging specification
YEDSD322409AG	SOD-323	Tape and reel	3000pcs / reel	EIA STD RS-481